



Pump specifications:

Type.....BA600G D743
 Max. flow6500 m³/hour (28600 US GPM)
 Max. pressure22 mwc (72 ft.)
 Connections.....Discharge DN600 – Suction DN700
 Solids handling 135 mm (5,3")
 Impeller typeAxial flow impeller
 Priming system BBA MP100
 Engine Volvo Penta TAD1182VE
 Emission standard .. Stage V
 Canopy EL23-58
 Sound level.....75 dB(A) at 10 m
 Dry weight..... 11.000 kg (24.200 lbs)

FEATURES

BA auto prime pump

The BA range of pumps has been designed with a clear focus on reliability, efficiency and durability. Featuring a 100% mechanical priming system, the BA series pumps quickly prime and re-prime, even from dry conditions. The heavy build style of both pump and canopy make the BA range perfect for use in the strenuous contractor market.

World-class performance

The BA range is built to be deployed on the most demanding dewatering and sewage bypassing applications. Using high efficiency pumps and state-of-the-art diesel engines, the pumps offer maximum performance at minimal cost, fully in-sync with the company philosophy of “Lowest cost of ownership”.

Sustainability

- High efficiency pumps minimising fuel consumption
- Corrosion free hot dip galvanized canopy
- Corrosion free composite door panels and powder coated plating
- 100% Oil-spill free priming system
- Fully bunded unit eliminating fuel/oil spills at all times

Complete package designed & built by BBA Pumps

- Complete in-house design & production
- Over 60 years of experience in the market
- Complete testing facility in-house
- Contemporary & functional design
- Durable & eco-friendly materials
- Custom builds available





After sales service & product support

- Single supplier for parts, spares & accessories
- Dedicated customer help-desk (24h service)
- Dedicated service department in-house
- Global parts distribution network
- Optional global on-site servicing available
- Extensive training options available (technical & commercial), on-site or in-house



PERFORMANCE CURVES (620 RPM)

Continuous duty according ISO 9906

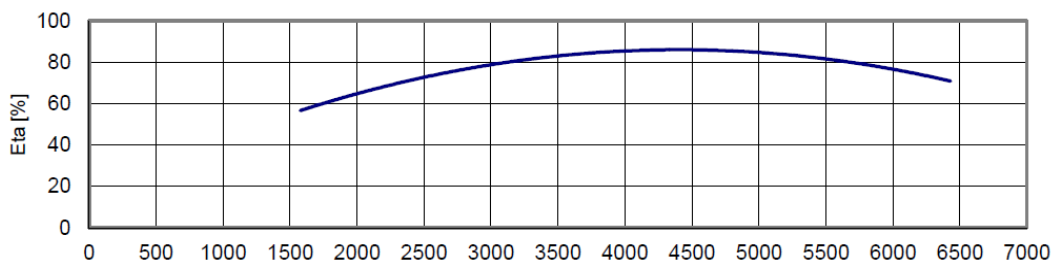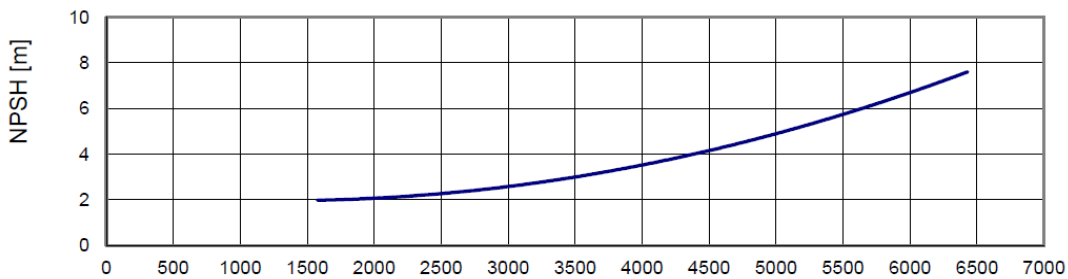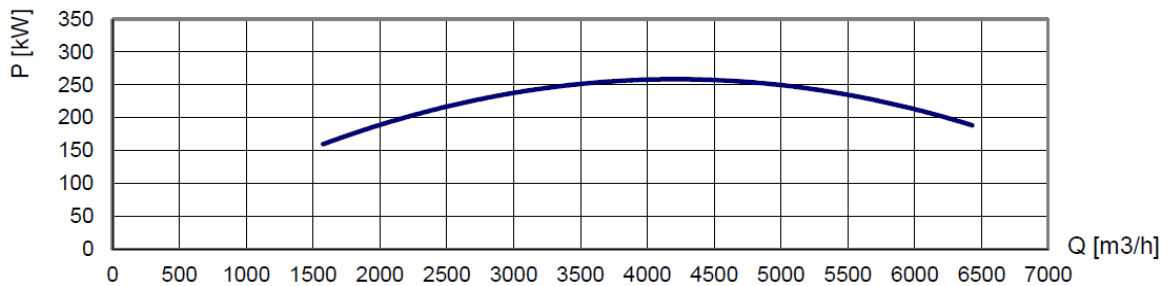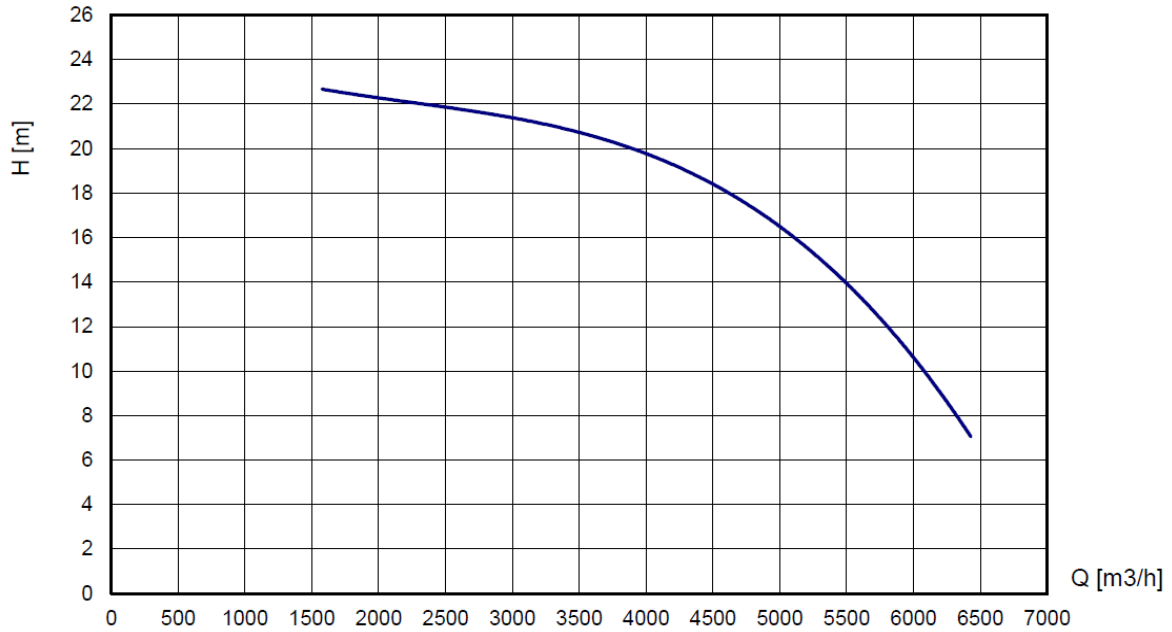

STANDARD TECHNICAL SPECIFICATIONS

BBA auto prime pump

Pump type.....BA600G D743
 Max. flow.....6500 m³/hour (28600 US GPM)
 Max. head.....22 mwc (72 feet)
 Discharge flange.....DN600 (PN6) K705
 Suction flange.....DN700 (PN6) K810
 Impeller type.....Axial flow impeller
 Solids handling.....135 mm (5.3 inch)
 Best efficiency point.....88%
 Pump casing.....Cast iron GG20
 Impeller.....Ductile iron GGG40
 Pump shaft.....42CrV6
 Shaft seal.....Mechanical seal



BBA priming system

Pump type.....BBA MP100 Diaphragm pump
 Air handling capacity.....100 m³/h (59 CFM)
 Max. vacuum.....8.5 m (29 inHg)
 Drive.....E-motor 24V
 Float box.....St 37 hot dip galv.
 Float.....Stainless steel 304
 Start/stop.....Fully automatic



Engine

Engine brand.....Volvo Penta
 Engine type.....TAD1182VE
 Flywheel power.....262 kW (356 Hp)
 Engine speed.....1550 RPM
 Fuel consumption.....200 g/kWh
 Displacement.....10.84 l (661 in³)
 Number of cylinders.....6
 After treatment.....SCR, DPF + DOC
 Emission level.....Stage V

BBA control panel LC30

- Auto start/stop system
- Two float switches included (10 m cable)
- Switch Manual-0-Auto
- Rpm. control with push buttons
- Warning lights
- The 4.3" LCD monitor displays additional engine data, e.g. actual engine speed, working hours, battery voltage, fuel consumption and failures in clear text (10 language support)



BBA non-return valve DN600


Flange size entrance.....DN600 PN6
 Flange size delivery.....DN700 PN6
 Casing.....St 37 hot dip galvanised
 Max. pressure.....4 bar – 58 PSI
 (More technical details see separate non-return valve data sheet)



CANOPY EL23-58

BBA sound attenuating canopy

- Canopy type..... EL23-58
- Dimensions L x W x H 5830 x 2306 x 2300 mm
- Dimensions L x W x H 229 x 90.8 x 90.5 inch
- Basic frame..... Hot dip galvanised
- Doors 8 Easy-access doors (lockable)
- Door panels ABS/ASA
- Fuel tank PE net 300 ltr. (80 US Gallon)
- Fuel tank autonomy 4 hours (at 1550 rpm BEP)
- Fuel tank cap 60 mm (2.5 inch)
- AdBlue® tank..... PE net 300 ltr.(80 US Gallon)
- Forklift pockets..... Fitted with 2 forklift pockets
- Lifting point Fitted with 4 lifting points
- Oil drain pump Drain pump for motor oil installed (hand pump)
- Connections..... Flange connections
- Emergency stop..... Applicable
- Additional..... Fitted with oil-water separator
- Documentation User manual & BBA warranty book

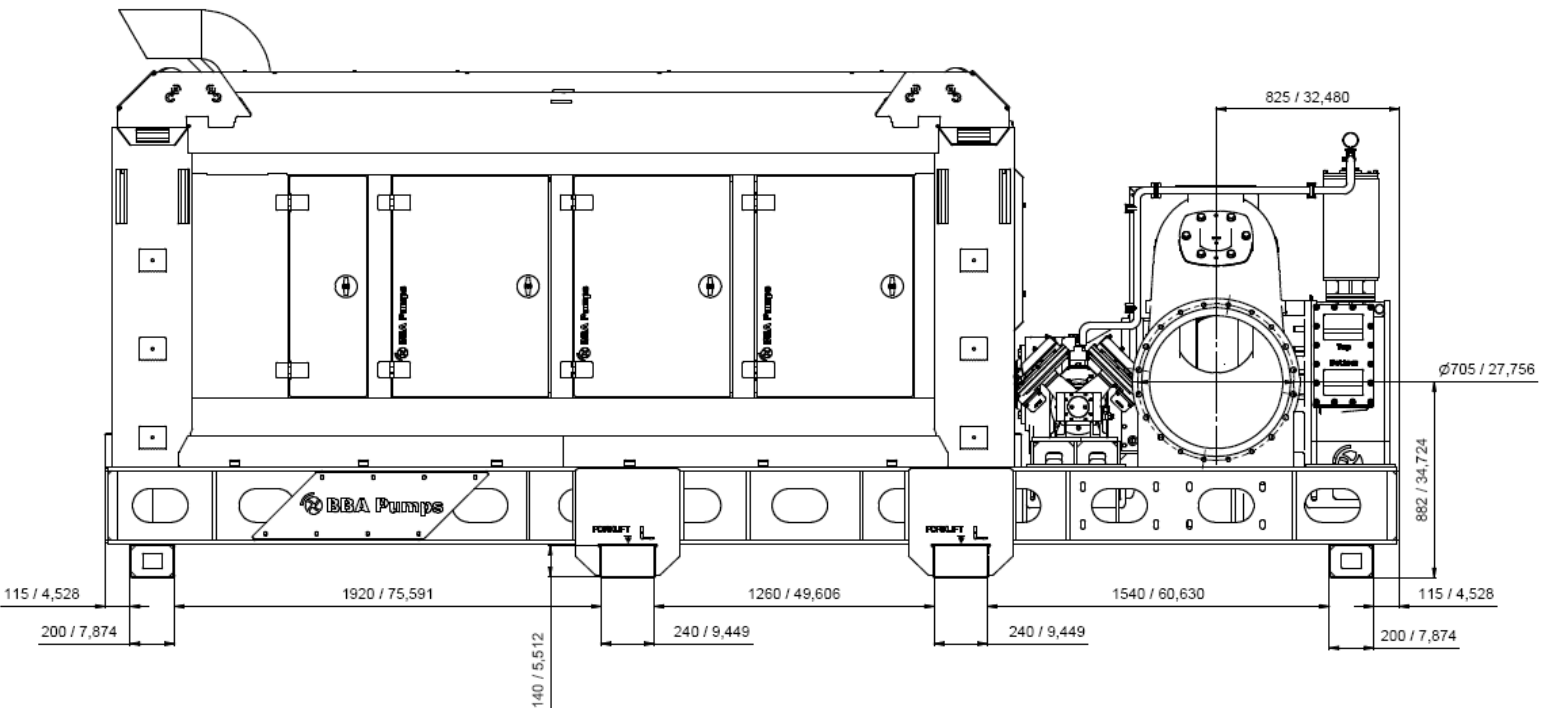

Actual dimensions (in mm & inches) may vary depending on selected connections.




Factory Acceptance Test
Extensive testing facility in-house. FAT must be conducted formally and be witnessed by the owner and/or project manager.




LED lights
Fully integrated in the canopy for easy operation throughout the evening and night.



Safety
Extremely durable and lockable T-locks offering perfect grip.



Fully banded unit
Fully banded unit eliminating fuel/oil and AdBlue® spills at all times.



Cardan shaft
Cardan shaft between pump and diesel engine for smooth operation, assembly angle 2.5° - 3°



Ratio transmission gearbox
Hydraulically actuated clutches and helical gearing for a smooth operating speed reduction between engine and pump.



Double vacuum pump
Diaphragm pump, air-cooled, water-resistant and oil-spillage free. Air capacity of 100 m³ per hour.



User manual BA series
Extensive user manual with important information concerning the pump unit, pump installation and safety warnings. Available in several languages.

Pictures used are for illustration purposes only.